



Door shown with optional custom logo

VSI - THOR III

Security

All Thor III Vault Doors are designed to meet Underwriters Laboratories requirements as outlined in Standard for Safety U.L. 608 and carry the U.L. label for selected Class. The standard door has a 12" vestibule. Optional sizes are available.

Installation

VSI or a local associate dealer will install your Thor III Vault Door anywhere in the world. All installation hardware, including jack bolt assembly and door stop are included.

The door is left completely protected after the installation process.

Secure Construction

Because of its special construction, the Thor III Vault Door weighs considerably less than a steel slab door. It can be installed in locations where weight constrictions limit installation. Construction includes special grade steel and high strength concrete. A door "collar" is available to allow the door to be installed flush with the inside vault wall.

TOP FEATURES

- 3 movement time lock with reset and release feature
- Two mechanical combination locks
- Day lock
- Emergency vault ventilator with pass through
- Alarm door contact
- Alarm rate of rise thermostat
- Acrylic day gate with key lock outside and lever inside
- Nonskid threshold
- Black acrylic access doors cover internal mechanisms.

Options

- Emergency inside release
- Third Combination or key lock
- Alarm wrap imbedded in core of door
- Smoke finish, rod style, split daygate
- 1/2" Solid acrylic daygate
- In-door telephone
- Custom sizes
- Hydraulic operation
- Finishes, Logos
- Ramps
- Optional access door packages
- Optional trim packages
- Various lock options

Custom Design

The Thor III attractive design and massive appearance will complement any décor. The satin smooth fine grained stainless steel finish covers every visible surface. Your choice of custom designed logos and special finishes are also available. The Thor III Vault Door is available with left or right swing.



Manufacturer reserves the right to change product specifications without notice.

Safety, Flexibility & Security

Constructed of special grade steel and high strength concrete the Thor III may be installed where weight constrictions limit installation



Standard Style Daygate





Rod Style Daygate



Solid Acrylic Daygate

Close Up Interior Door Components

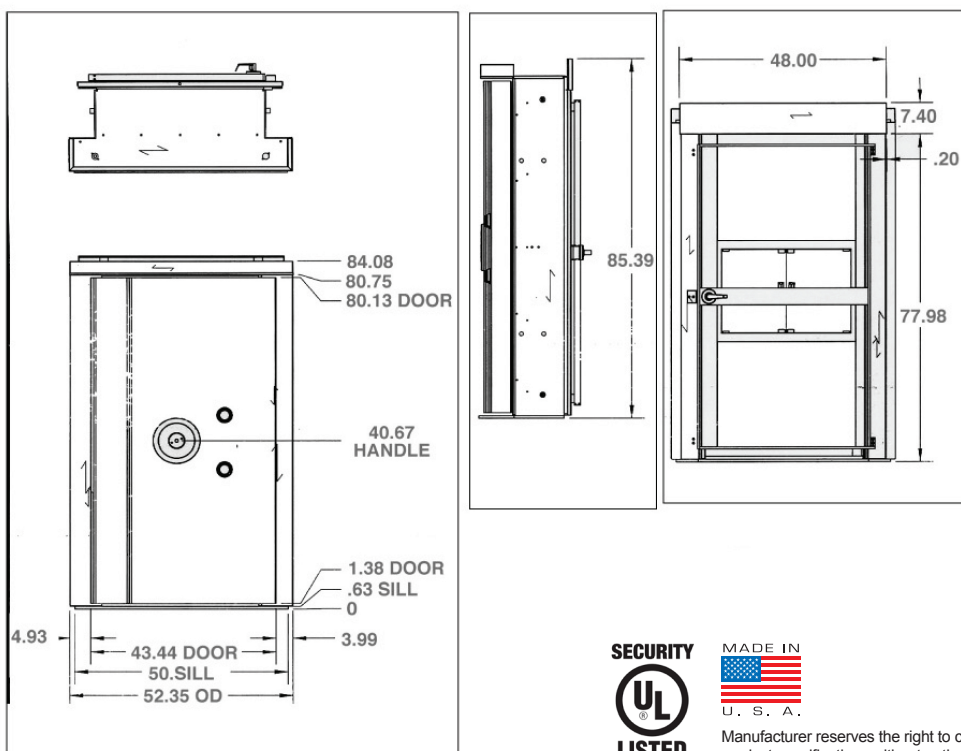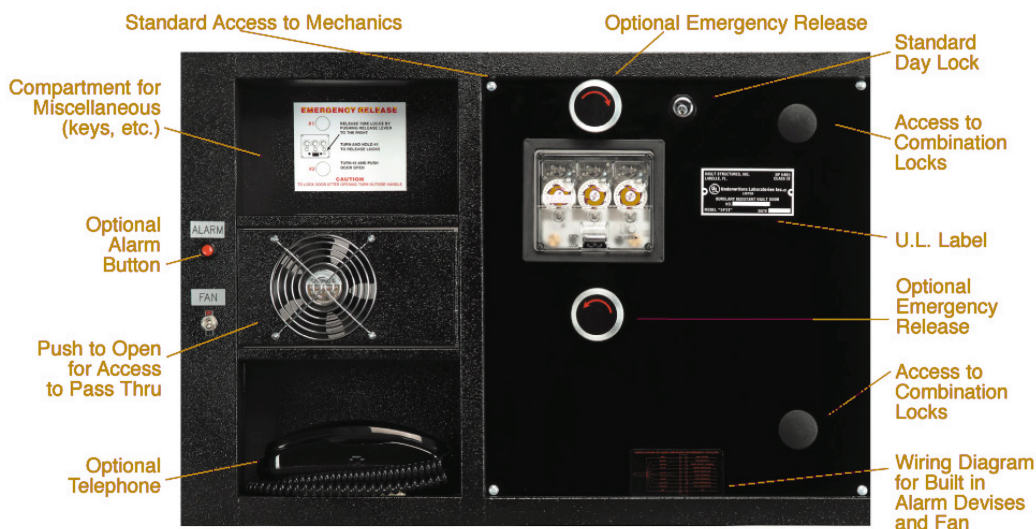

Manufacturer reserves the right to change product specifications without notice.