



TOP FEATURES

- 1/2" Steel Door
- Special VSI Locking Design
- Special VSI Hinge Design
- Industrial Textured Finish
- UL Listed

VSI - THE "SAFE" CHOICE

Versatility

Standard safes range in size from 15" high to 84" high. Special sizes are available to meet any customer needs. Options include special VSI locking configurations, adjustable or fixed shelves, decorative panels, depository configurations, and special interiors. Standard colors are beige, black, and tan. Special colors are available to match submitted paint samples.

Secure Construction

The TL15 from VSI is Underwriters Laboratory listed. TL15 safes are constructed of 1/2" steel, with 1/2" steel door, group 2 combination locks are standard.

Installation

Safes are shipped crated and normally require professional installation. Safes weighing less than 750 lbs. must be fastened to the floor.

TL15

Standard safe selection with Group 2 Combination Locks

Model No.	Outside Dimensions	Clear Inside Dimensions	Wt.
1524	24"H x 24"W x 24"D	20.75"H x 21.5"W x 18.5"D	600
1526	26"H x 26"W x 24"D	22.75"H x 23.5"W x 18.5"D	660
1536	36"H x 24"W x 24"D	32.75"H x 21.5"W x 18.5"D	785
1536	36"H x 36"W x 24"D	32.75"H x 33.5"W x 18.5"D	985
1570	70"H x 37"W x 32"D	66.75"H x 34.5"W x 26.5"D	1850
1574	74"H x 37"W x 32"D	70.75"H x 34.5"W x 26.5"D	1950

For safes requiring interiors allow a 5.5" setback to clear lock and depth of door.

For door swing of 90° safe with interior, safe must be a minimum of 38". For 120° or greater door swing, safe must be 36."



Manufacturer reserves the right to change product specifications without notice.

Versatility, Security & Dependability

*VSI's standard or custom TL15 safes
meet any configuration needed!!!*

TL-15 SAFE

HOW TO FIGURE CLEAR INSIDE DIMENSIONS:

OUTSIDE HEIGHT (-1 1/4")= INSIDE CLEAR HEIGHT*

OUTSIDE WIDTH (-2 1/2") = INSIDE CLEAR WIDTH

OUTSIDE DEPTH – SEE SKETCH = INSIDE CLEAR DEPTH

**ALLOW 2" ADDITIONAL CLEARANCE IF ALARM DEVICE REQUIRED*

EXAMPLE 1: 36"H X 38"W X 31"D

36" HEIGHT OUTSIDE: 36" (-1 1/4") = 34 3/4" INSIDE CLEAR HEIGHT

38" WIDE OUTSIDE: 38" (-2 1/2") = 35 1/2" INSIDE CLEAR WIDTH

33" DEPTH OUTSIDE: 31" (-4 1/2") = 26 1/2" INSIDE CLEAR DEPTH

NOTE: IF THE INSTALLATION HAS LIMITED DOOR SWING, USE THE PROPER CLEAR OPENING FOR DOOR SWING


NOTES:

H= HEIGHT

W= WIDTH

D= DEPTH

W/D= WALL CLEARANCE

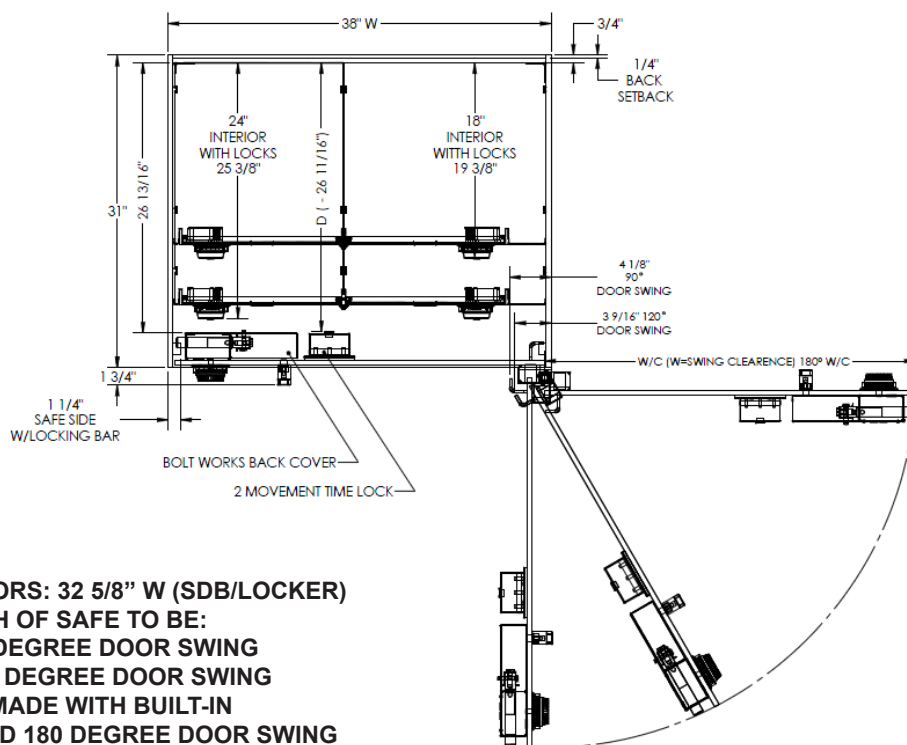

WITH INTERIORS: 32 5/8" W (SDB/LOCKER)
NESTS WIDTH OF SAFE TO BE:
38" WITH 90 DEGREE DOOR SWING
37" WITH 120 DEGREE DOOR SWING
36" CAN BE MADE WITH BUILT-IN
INTERIOR AND 180 DEGREE DOOR SWING



Manufacturer reserves the right to change product specifications without notice.